


















## Air Boy® Classic

## ROBUST AND IMPACT RESISTANT, INFINITE ADJUSTMENT, LEAK FREE

Air Boy® Classic is the standard model of our blow guns. The model is suitable for many different purposes as blow-off, cleaning and drying tasks.

The timeless design, impact resistant materials and infinite adjustment makes the blow gun very user-friendly and long-lasting.

The Air Boy® blow guns are leak free and available in different varieties to fit exactly your needs. They are produced with straight as well as bent pipes and with longer pipes, which enables work in narrow places. The pipes comes in either galvanized or stainless steel where the stainless steel blow guns are ideal for fluids and aggressive environments.

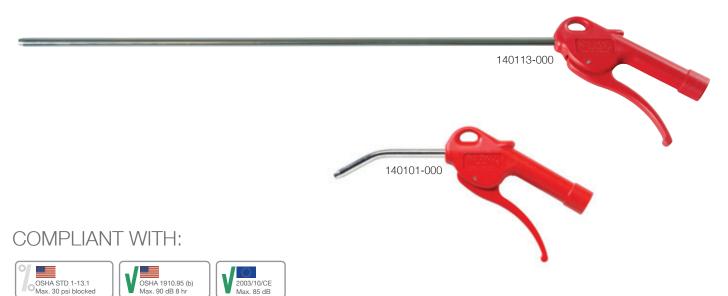

Air Boy® Classic		Art. No.
	Air Boy® Classic blow gun with ø8 mm straight pipe	140100-000
	Air Boy® Classic blow gun with ø6 mm straight pipe	140105-000
	Air Boy® Classic blow gun with ø8 mm bent pipe	140101-000
	Air Boy® Classic blow gun with ø6 mm bent pipe	140102-000
	Air Boy® Classic blow gun with ø8 mm bent pipe & metal bushing	140182-000
	Air Boy® Classic blow gun with ø6 mm bent pipe & metal bushing	140181-000
	Air Boy® Classic blow gun with ø8 mm bent pipe & adjustment	140103-000
	Air Boy® Classic blow gun with ø6 mm bent pipe & adjustment	140104-000

Air Boy® Classic Stainless steel AISI316		Art. No.
	Air Boy® Classic blow gun with ø8 mm bent pipe - stainless (AISI316)	140120-000

Air Boy® Classic long blow pipes		
	Air Boy® Classic blow gun with ø8 mm x 300 mm straight pipe	140112-000
	Air Boy® Classic blow gun with ø8 mm x 500 mm straight pipe	140113-000
	Air Boy® Classic blow gun with ø8 mm x 1000 mm straight pipe	140114-000
	Air Boy® Classic blow gun with ø8 mm x 300 mm bent pipe	140112b-000
	Air Boy® Classic blow gun with ø8 mm x 500 mm bent pipe	140113b-000
	Air Boy® Classic blow gun with ø8 mm x 1000 mm bent pipe	140114b-000





Materials		
Handle and trigger	Acetal plastic	
Valve	Acetal plastic	
Gaskets / O-rings	Nitrile	
Blowing tube and shaft	Steel, electro-galvanized	
Spring	Hardened spring wire	

Specifications	ø8 mm	ø6 mm	
P Working pressure	Max.	Max. 16 bar	
Flow at 8 bar	380 l/min.	330 l/min.	
Noise level at 8 bar	85 dB	83 db	
Temperature range	-10 °C to +80 °C		
		)5 kg	

